

What is the Deye ESS battery module model Bos-G?

With its advanced technology and comprehensive features, the Deye ESS Battery Module Model BOS-G is not just an energy storage solution—it's a commitment to reliability, efficiency, and sustainability. Enhance your energy management capabilities with BOS-G, whether for residential, commercial, or industrial applications.

What is a Deye Bos-G LiFePO4 battery?


With its robust design, advanced features, and exceptional performance, the Deye BOS-G LiFePO4 battery system is the ideal choice for those seeking a reliable and efficient energy storage solution. Deye is the world's leading 100ah solar battery. We are also looking for partners around the world.

Does the Bos-G Pro work with Deye inverters?

The system supports USB and WiFi upgrades (optional) and is compatible with Deye inverters for remote upgrades. Wide Temperature Range: With a working temperature range of -20°C to 55°C , the BOS-G Pro delivers excellent discharge performance and cycle life in various climates.

What is the operating temperature range of the Bos-G series?

The system also features a wide operating temperature range of -20°C to 55°C , making it suitable for various environments. The BOS-G series comes equipped with a high-voltage box (HVB750V/100A) that enables seamless integration with your existing power system.

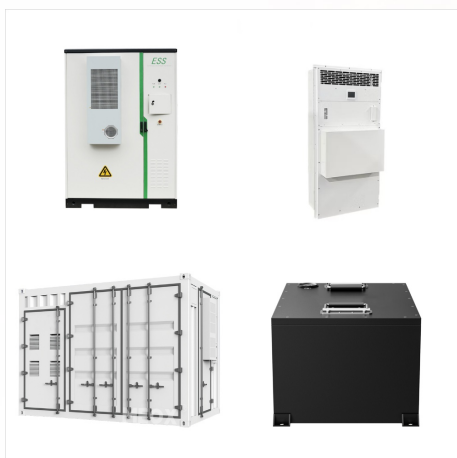

BoS-G. TechnicalData CellChemistry LiFePO4
Module Energy(kWh) HVB750V/100A-EU
HVB750V/100A-US BOS-GM5.1 Model 5.12 kWh
battery module Description EPCable5.0(Optional)
Standard 5-meter power cable connected to the
positive pole of the external PCS Operating Voltage
120? 1/2 ?750Vdc Nomina Charge/Discharge
Current 100A




BMS HV Deye BMU ??? 3/4 ? 1/2 ????? 3/4 ?>>?
1/2 ?? ???????,?? ???? ???>???????u?? ??
???,??? 3/4 ??? 3/4 ? 1/2 ???????u???u? 1/2 ?,?u
???? BOS-G (HVB750V/100A-EU) ??? 3/4
???u?>>: BOS-G-HVB750V/100A-EU Control Box
??????? 1/4 ?u?????,? 1/4 ? 3/4 ???? : ????? 3/4
?u?????,????? 1/2 ???? ?,????? 3/4 ?>>???????
1/2 ?u ?? ???,??? 3/4 ??? 3/4 ??? 3/4 ?>>??? 3/4
???? ???????u???,??? 1/2 ?? ???,?????u? 1/4 ??
Deye ???




Discover the Deye: BMU High Voltage Battery
Cluster Control Box for BOS-G (Model:
HVB750V/100A-EU). First, this tool has impressive
technical data. It operates within a diverse voltage
range of 120-750 Vdc. Deye Cluster Control ???



bms ???>?? ????????????u?? deye bos-g
120-750vdc 100a ? 1/2 ?u ????? 3/4 ????? 3/4
???u??? 1/2 ????? 1/2 ?,?? ?????,???????????,
???u ?????? ? 1/2 ?????????? 1/2 ?,?? ??????????
1/2 ?u?? ?? ?????>?????? ?u? 1/2
?u?????u???,??? 1/2 ? 3/4 ?? ???u?????u???,
???? ?u???u?????,??? 1/2 ? 3/4 ??????.

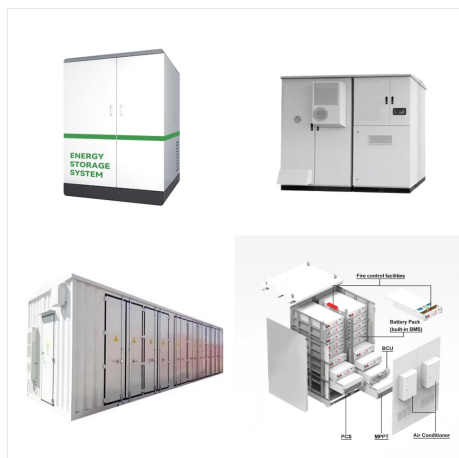

??? 3/4 ? 1/4 ???>>?u???? ????????????? 1/2 ?
 3/4 ??? 3/4 ???,???>>?u? 1/2 ? 1/2 ?? ??? 1/2
 ???u???? 3/4 ?? deye sun-20k-sg01hp3-eu-am2 +
 ?????? bos-gm5.1 6 ????? + bms bos-g 120-750vdc
 100a. ???u????>>??? 1/2 ?? ??? 1/2 ??? 3/4 ???
 1/4 ????????? ?????? 3/4 ??? 3/4 ???????/??? 3/4
 ???>>??????? ????? ??? 3/4 ?????????????>>??? 1/2
 ?,?????. ?????? 1/2 ?? ????? ??? 1/4 ? 3/4 ???, ???
 3/4 ??????????????,

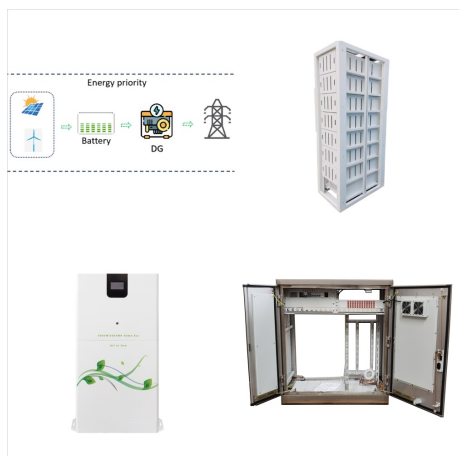

Provozn? nap??t? 120 a? 3/4 750 VDC; Nab?jec?
 a vyb?jec? proud 100 A; Maxim?ln? nab?jec? a
 vyb?jec? proud 125 A (HVB750V/100A-EU)
 zna??ky DEYE pro vysokonap????ov? bateriov?
 cluster je standardn?? nap?jena s nap??t?m z ???



bms ???>>?? ?????????????u?? deye bos-g
 120-750vdc 100a. ???u????>>??? 1/2 ?? ??? 1/2
 ??? 3/4 ??? 1/4 ????????? ?????? 3/4 ??? 3/4
 ???????/??? 3/4 ???>>??????? ????? ??? 3/4
 ?????????????>>??? 1/2 ?,?????. ?????? 1/2 ?? ?????
 ??? 1/4 ? 3/4 ???, ??? 3/4 ??????????????,



0(44) 337-22-11 ??? 3/4 ?????>??
????????????>??? 1/2 ? 1/2 ?? (BMS) Deye
???>?? ???????????u?? BOS-G 120-750Vdc
100A (HVB750V/100A-EU) ?(R)? ???????,???, ??
???,?????? ?? VENCON.UA ?????? ?????? 1/2 ??
??? 3/4 ???????,????? (07.11.2024) ?(R)? ???????
1/4 ?? Deye ?(R)? Deye ???>?? ???????????u??
BOS-G 120-750Vdc 100A (HVB750V/100A-EU):
???????????????, ???????????????u???,?????,???,
??? 1/2 ???????????????????, ???????????>?????u?
1/2 ? 1/2 ??



Add: No. 26 South YongJiang Road, Daqi, Beilun,
NingBo, Zhejiang, China. | Tel:
0086-0574-86120560 | E-mail: market@deye .cn
BOS-G High Voltage LiFePO4 Lithium Battery.
Ningbo Deye Inverter Technology Co., Ltd.
HVB750V 100A-EU HVB750V 100A-US
BOS-GM5.1 Model 5.12 kwh batt ery modul Descr
ipt on Operating Voltage 120 750Vdc Nominal




BOS-G. Technical Data. LTD. NO. 18TH
ZHENGLONG ROAD LONGHSAN CIXI NINGBO
ZHEJAING 315311 P.R INA . Tel: +86- 0574- 8622
9263| E -mail: sales @deye .cn . Model BOS-G.
Main Parameter Cell Chemistry LiFePO4. Module
Energy (kWh) 5.12. Operating Voltage 120? 1/2
?750Vdc. Nominal Charge/Discharge Current 100A



Provozná napětí 120 a 3/4 750 VDC; Nabíjecí a vybíjecí proud 100 A; Maximální nabíjecí a vybíjecí proud 125 A (HVB750V/100A-EU) značkový DEYE pro vysokonapěťové bateriové cluster je standardně napájena s napětím z měřiče. Silový propojovací kabel na propojení kladného pólu DEYE BOS-G baterie a libovolného DEYE



4.2 BOS-G Product Description BOS-G is a high-voltage lithium-ion battery system. It provides a reliable backup power supply for supermarkets, banks, schools, farms and small factories to ???

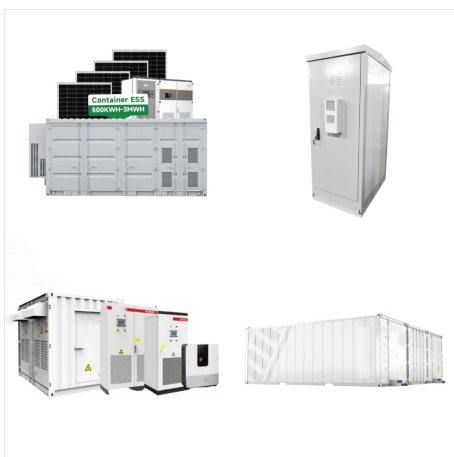

The BOS-G Pro is a state-of-the-art LiFePO4 battery storage system designed for convenient installation, safe and reliable operation, and flexible configuration. This innovative product is perfect for both residential and commercial applications, ???



bms ???>?? ??????????u?? deye bos-g
120-750vdc 100a ? 1/2 ?u ????? 3/4 ????? 3/4
???u??? 1/2 ????? 1/2 ?,?? ?????,???????????,
???u ?????? ? 1/2 ?????????? 1/2 ?,?? ??????????
1/2 ?u?? ?? ?????>?????? ?u? 1/2
?u?????u???,??? 1/2 ? 3/4 ?? ????u?????u???,
???? ?u???u?????,??? 1/2 ? 3/4 ??????.



? ????? 3/4 ??? 3/4 ?????????? 3/4 ???? ?,? 1/2
????????>?,????? 1/2 ?u ? 1/2 ?? Deye BOS-G.
Deye BOS-G ? ????? 3/4 ??? 3/4 ?????????? 3/4 ?
1/2 ?? ??? 1/2 ???>?,????????, ?, ???u??? 1/4
??? 1/2 ?,??. ???u???>?????????,?? ????
???????? 1/4 ?u?????,? 1/4 ? 3/4 ???? ? 1/2 ?? ?,?
1/2 ???u????? 3/4 ???? Deye BOS-GM5.1. Deye
BOS-GM5.1 ??? 1/2 ??? 3/4 ??? 1/4 ??????,? 3/4 ?
1/2 ? 1/2 ?, ?>?,????? 3/4 ???u ???? ???u??? 3/4
???????? 1/2 ? 3/4 ?????



The BOS-G series comes equipped with a
high-voltage box (HVB750V/100A) that enables
seamless integration with your existing power
system. The high-voltage box supports an operating
voltage range of 120-750 Vdc and a maximum ???



BOS-G. Technical Data NINGBO DEYE ESS TECHNOLOGY CO., LTD HVB750V/100A-EU HVB750V/100A-US BOS-GM5.1 Model 5.12 kwh battery module Description EPCable5.0(Optional) Standard 5-meter power cable connected to the positive pole of the external PCS Operating Voltage 120? 1/2 ?750Vdc Nominal Charge/Discharge Current 100A



BOS-G Higher yields / Safe & Reliable / Smart / User-friendly HVB750V/100A-EU. High Voltage Battery cluster control box conforming to European or British Standards Operating Voltage 120~750Vdc. Nominal Charge/Discharge Current 100A. Max. Charge/Discharge Current 125A. DC Input Rating



bms ??? 3/4 ? 1/2 ?????? 3/4 ?>>?u??
hvb750v/100a-eu. ???>? 3/4 ?? ???u?????????
1/2 ? 1/2 ?? ???,??? 3/4 ??? 3/4 ??? 3/4 ?>>?????
1/2 ?,? 1/4 ? 1/4 ? 3/4 ?????>>?u? 1/4 lfp 51.2??
100a, bos-gm5.1. ?????>>????? 3/4 ????
??????????,? 1/2 ?? ???,?????u? 1/4 ?,
?????u?????????? 1/2 ? 1/2 ?? ?u? 1/2
?u????????? bos-g ???,??? 3/4 ??? 1/2 ?,?????????
deye.



BOS-G. Technical Data NINGBO DEYE ESS TECHNOLOGY CO., LTD HVB750V/100A-EU HVB750V/100A-US BOS-GM5.1 Model 5.12 kwh battery module Description EPCable5.0(Optional) Standard 5-meter power cable connected to the positive pole of the external PCS Operating Voltage 120? 1/2 ?750Vdc Nominal Charge/Discharge Current 100A




The BOS-G Pro is a state-of-the-art LiFePO4 battery storage system designed for convenient installation, safe and reliable operation, and flexible configuration. This innovative product is perfect for both residential and commercial applications, providing a sustainable and efficient energy storage solution.



Deye is renowned for its dedication to innovation and quality in the energy sector. The HVB750V/100AH H/V Cluster Control Box exemplifies this commitment, combining advanced technology with practical design to deliver superior energy management solutions. Specifications. Voltage compatibility: 120V to 750Vdc; Current capacity: 100A nominal



BMS ???>?? ??????????u?? DEYE BOS-G
120-750Vdc 100A - ???>? 3/4 ??
????????????>??? 1/2 ? 1/2 ?? ?????? 1/4
???>????? 3/4 ????? 1/4 ?, ?????? ???,??? 3/4
??? 1/2 ?,???? Deye.. ???u??? 1/2 ????? 1/2 ? 3/4
??? 3/4 ??? 3/4 ??? 1/2 ????? ???>? 3/4 ???,
???????? 1/4 ???>????? 3/4 ??? 1/2 ?,??
????????????u?? ????? ??? 3/4 ? 1/2 ????? 3/4
?>????? ??? ??????? 1/2 ??????????????, ???
3/4 ?????????????, ???????,?????? ???

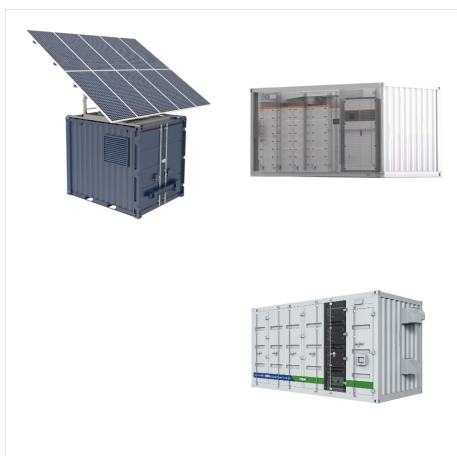

Deye inverter). Wide temperature Working
temperature range is from -20°C to 55°C, with
excellent discharge performance and cycle life.
BOS-G. Technical Data Cell Chemistry LiFePO4
Module Energy (kWh) Operating Voltage 120? 1/2
?750Vdc Nominal Charge/Discharge Current 100A



Pentru persoanele fizice cu naționalitate Română
se va aplica o cotă TVA de 9% la produsele care
au această opțiune.. Pentru societățile care
prezintă o declarație pe propria răspundere
precum că beneficiarul final este persoana fizică
se va aplica o cotă TVA de 9% la produsele care
au această opțiune.. Societățile comerciale
fără declarație pe propria răspundere vor fi



Discover the Deye: BMU High Voltage Battery Cluster Control Box for BOS-G (Model: HVB750V/100A-EU). First, this tool has impressive technical data. It operates within a diverse voltage range of 120-750 Vdc. Deye Cluster Control box BMU for BOS-G Battery for the Deye BOS-G 5.12kwh HV Lithium-Ion Battery. 120-750Vdc. Nominal Charge/Discharge