



9 Technical data 9.1 Characteristics and specification Reference temperature 23 °C
High-voltage terminals 2 HAUG- High-voltage terminals All HAUG ionizing units fitted with Connectable HAUG ionizing units X - 2000 connector High-voltage U = approx. 7 - 8 kVAC
Contact load max. 24 VAC/35 VDC, Signalling terminal EN SL RLC max.



HAUG VS021.4200 HAUG HAUGVSmm
EN-SL-RLC HAUG HT-cable VK-NORM 23 650
L=6500 HAUG 05.8519.650 EN 70 LC 230VAC
50-60Hz 2ht HAUG 01.7701.100 EN-8 LC
PART-NOi 1/4 01.7757.100 HAUG 01.7757.100
detachable ht-cable vk norm 22 HAUG 02.
8522.000



en sl lc. en sl,a??a??leda?? en sl rlc



Entladenetzteil EN SL RLC digital Identnummer:
01.7845.000 (230 V), 01.7846.000 (115 V)
spannungsversorgung von
HAUG-Ionisationsgeräten mit X-2000 Stecker. In
Kombination mit einem Ionisationsgerät wird in
einem Fertigungsprozess elektrostatische Ladung
neutralisiert.



Netzteil S-Line EN SL RLC Das Entladenetzteil EN
SL RLC ist baugleich mit dem EN SL LC. Es verfügt
zusätzlich über eine Meldebuchse zur Weitergabe
des Betriebszustands an eine Maschinensteuerung
oder einen Leitstand. Die Belastung der
potentialfreien Kontakte beträgt max. 24 V AC / 35
V DC bei max. 50 mA. Netzteil S-Line EN SL RLC
digital



Le bloc d'alimentation EN SL est un dispositif
electronique a architecture modulaire garantissant
un grand confort de maintenance. Le bloc
d'alimentation EN SL est dote de deux raccords
haute tension et alimente en tension electrique les
ionisateurs HAUG, la tension de secteur appliquee
etant trans-formee a environ 7 a 8 kV AC par le
transformateur HT integre.



Bedienungsanleitung EN SL RLC Seite 3 a?? 23 .
 Operating instructions EN SL RLC page 24 a?? 44 .
 Mode d'emploi EN SL RLC page 45 a?? 65 .
 Identnummer : Id number : N? d"ident: 01.7835.300
 (230 V), 01.7835.308 (200 V), Firma HAUG GmbH
 & Co. KG aufnehmen.




Discharging power pack EN SL Ident number:
 01.7780. 500 (230 V), 01.7780.508 (200 V),
 01.7781.500 (115 V), 01.7781.508 (100 V),
 alternating high voltage to HAUG ionizing units with
 X-2000 connector. In combination with an ionizing
 unit, electrostatic charges



The high-voltage power pack EN 70 / EN 70 LC /
 EN 70 RLC is a powerful and hardwearing unit s
 design fulfills all electrical engineering requirements.
 The EN 70 / EN 70 LC / EN 70 RLC power pack is
 used in fast-running machines in combination with
 tandem ionizing bars.



Power Pack EN SL LC. As EN SL, but with integrated full-electronic function monitoring. This system constantly monitors all functions of the ionizing system without any further measuring or test equipment. It alerts the operator of any a?]

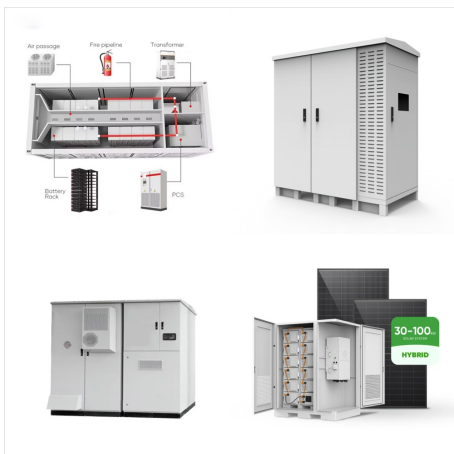

EN SL RLC with thermal cutout, signalling lamp and signalling socket: 01.7835.100, 01.7835.150, 01.7836.100, 01.7836.150 . 1 Operator instructions
1. Operator 2 HAUG- High-voltage terminals .
Connectable HAUG ionizing units . All HAUG ionizing units fitted with X - 2000 connector .
High-voltage .



The S-Line power pack works ideally with HAUG ionizing S-Line power pack EN SL LC As EN SL, but with integrated full-electronic function monitoring. This system constantly monitors all functions of EN SL RLC 230 V 10 m 5 mA
01.7780.400 0 0 T A T I C 14 5 17 5 O 7 T A T I C 1
9 0 9 7 1 6 7 1 7 1 1 0 7 300 International Drive,
Suite 100



EN SL RLC mit Thermowachter, Meldeleuchte und Meldebuchse: 01.7835.100, 01.7835.150, 01.7836.100, 01.7836.150 . 1 Benutzerhinweise 1. von HAUG-Ionisationsgeräten mit X-2000 Stecker. An das Netzteil dürfen ausschliesslich HAUG-Ionisationsgeräte mit X-2000 Stecker angeschlossen und betrieben



The EN 70 / EN 70 LC / EN 70 RLC power pack is used in fast-running machines in combination with tandem ionizing bars. << Learn More << Power Pack EN SL. the HAUG EI SL ionizing bar is setting new standards: Ensuring an optimal neutralizing effect, it eliminates electrostatic charges during roll, sheet and web processing.




haug vs 021,4 200 haug en sl rlc ul id. 01.7904.100 nr. 100034/01 haug en sl rlc 2,6 m netzkabel haug 12.7210.000 haug 08.8711.000 haug 08.8711.000 hs-06.2225. haug 06.2225.000 haug 06.2225.000 ak n 22 als haug 01.7760.000 haug vln 22 150(2m)



HAUG Static Control EN SL RLC digital Technical Data: Input Voltage: Either 230V or 115V 50-60Hz (customer to specify preference) Enclosure:200mm L x 190mm W x 110mm H Weight: 3.6kg IP: 45 Part Number: P-01.7845.000 (230) P-01.7846.000 (115) Signaling cable: P-06.8976.000 (5m)



haug en-sl-rlc haug en-sl-rlc,,,haug,,,,,i 1/4 ?,

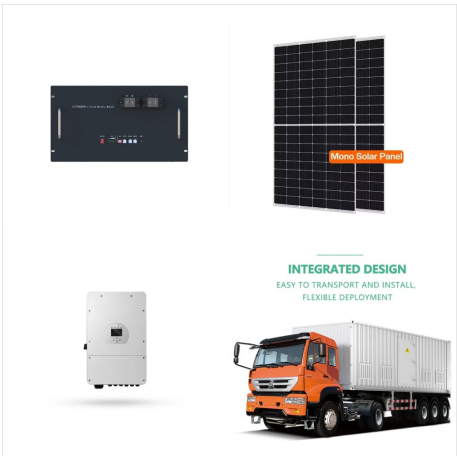

haugen sl rlc 01.7835.200 . haug en sl . en sl , a??en sl , haug a?? 7 a?? 8 kva??




EN SL II Signalling cable K3 Plug EN SL RLC / EN
SL SD Signalling cable K6 Plug Types EN SL EN
SL EN SL EN SL EN SL EN SL LC EN SL
LC EN SL RLC EN SL RLC (230 V) Order-No.:
01.7780.220 (115 V) Order-No.: 01.7781.220
Output short-circuit current 3 mA, max. connectable
length 5 m (230 V) Order-No.: 01.7780.200 (115 V)
Order-No.: 01.7781.200



We have 2 HAUG EN SL LC manuals available for
free PDF download: Operating Instructions Manual .
HAUG EN SL LC Operating Instructions Manual (26
pages) Brand: HAUG HAUG EN SL RLC ; Haug
EN SL MT Series ; Haug EN SL SLC MT




EN SL RLC Power Supplies from HAUG 2-Year
Warranty, Radwell Repairs - POWER PACK,
115V/50-60 HZ, 2X HT CONNECTIONS. UL-CSA
+1 (800) 884-5500 Live Chat.
Same Day Shipping & Rush Processing Available
+1 (800) 884-5500 Experts Available 24/7 365. Live
Chat. English USD (\$)

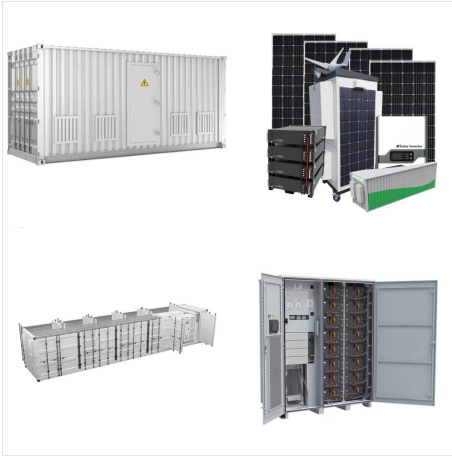

We have 1 HAUG EN SL RLC manual available for free PDF download: Operating Instructions Manual . HAUG EN SL RLC Operating Instructions Manual (26 pages) Brand: HAUG | Category: Power Pack | Size: 0.57 MB Table of Contents. Table of Contents. 3. 1 Operator Instructions. 5. 2 Safety. 6. 3 Intended Use



.100 Power Supplies from HAUG 2-Year Warranty, Radwell Repairs - POWER PACK, 230V, 50-60HZ, 40VA, TYPE EN-SL RLC +1 (800) 884-5500 Live Chat. TYPE EN-SL RLC FACTORY WARRANTY MAY NOT APPLY. RADWELL 2-YEAR WARRANTY INCLUDED Warranty. We provide a Radwell 2-year warranty on every item we a?|

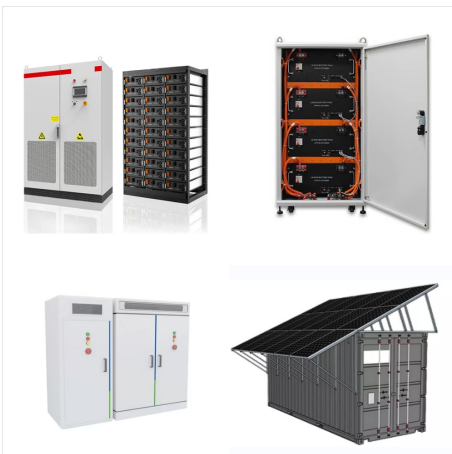

The Haug S-Line or EN-SL Power Supplies or Power Pack units are CE approved for European applications and where the CE approval is required. Like the EN-C the EN-SL series produces a high voltage in the range of 7,000 to 8,000 volts. The EN SI RLC has a socket to connect to a separate main board to indicate if a fault occurs. View More



EN SL LC, EN SL RLC, EN SL SD Schutzart: IP 54

Versorgungsspannung: 115 V / 230 V (50 a?? 60

Hz) Leistungsaufnahme: ca. 40 VA

Nenn-Ausgangsspannung: ca. 7 a?? 8 kV

Belastbarkeit der Meldekontakte: 24 V / 35 V ; max.

50 mA EN SL / EN SL LC / a?]