




PowerSafe(R) mSeries (DDm) Batteries. PowerSafe(R) mSeries batteries offer an ideal solution for large capacity Valve Regulated Lead Acid (VRLA) battery requirements. Featuring a steel can (module) design with an integral racking system, PowerSafe mSeries batteries provide a cost-effective battery system with a compact, quick and simple



PowerSafe(R) D Batteries. Engineered for telecommunications, utility and switchgear applications, PowerSafe(R) D batteries are available in the DU and DSG series. PowerSafe DU batteries are designed to handle the demanding float and deep discharges typical for telecommunication applications, while PowerSafe DSG batteries have lower watering

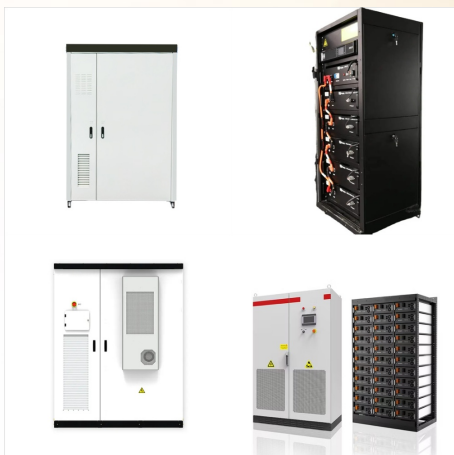

Introducing the PowerSafe GU 2 Publication No. US-GU-PS-002 June 2023 The PowerSafe GU product line ranges from 930Ah to 3900Ah, and is the largest clear flame retardant flooded cell in the industry. The Power Safe GU battery features flat plate construction with calcium alloy grids ideal for any long duration float application.



The PowerSafe (R) V range of Valve EnerSys
World Headquarters 2366 Bernville Road, Reading,
PA 19605, USA Tel: +1-610-208-1991 /
+1-800-538-3627 EnerSys EMEA EH Europe
GmbH, Baarerstrasse 18, 6300 Zug, Switzerland
Tel: +41 44 215 7410 EnerSys Asia 152 Beach
Road, Gateway East Building #11-03, Singapore
189721 Tel: +65 6508 1780



manufacture of PowerSafe V-FT products are ISO
9001, ISO 14001 and ISO 45001 Nominal Capacity
(Ah) EnerSys World Headquarters 2366 Bernville
Road, Reading, PA 19605, USA Tel:
+1-610-208-1991 / +1-800-538-3627 EnerSys
EMEA EH Europe GmbH, Baarerstrasse 18, 6300
Zug Switzerland EnerSys Asia 152 Beach Road,
Gateway East Building #11-08, Singapore



The PowerSafe(R) RM series of nickel-cadmium
(Ni-Cd) batteries are specifically designed for
"mixed loads" that includes both high and low rates
of discharge. The pocket plate design and Ni-Cd
chemistry provide exceptionally long life at extreme
temperatures. This coupled with the inherent low
maintenance requirements make the PowerSafe
RM



EnerSys PowerSafe??? 6V105 batteries have been designed specifically for use in applications which demand the highest levels of security and reliability. With proven compliance to the most rigorous international standards, PowerSafe V is recognized worldwide as the premium battery for Telecom applications. PowerSafe Vs reputation for long service life, together with excellent ???



PowerSafe(R) OPzS Batteries. Engineered with an optimized plate design, PowerSafe(R) OPzS batteries feature an increased capacity that exceeds the internationally recognized DIN standard. Designed to deliver the highest levels of reliability and security, PowerSafe OPzS batteries are used in wide range of applications, including



Batteries PowerSafe(R) V . Dot?es de la technologie VRLA (Valve Regulated Lead Acid, batterie au plomb r?gul?e par soupape), les batteries PowerSafe(R) V sont con?ues pour les applications de secours qui exigent une s?curit? et une fiabilit? extr?mes.



EnerSys(R), the global leader in stored energy solutions for communications applications, has introduced the PowerSafe(R) iON 36-1800, a new Lithium-ion battery that when coupled with an Alpha(R) XM3.1-HP Broadband UPS and enclosure provides Cable Broadband operators extended run time systems to maintain network operations for up to 72 hours after ???



EnerSys PowerSafe??? 12V30F Front Terminal batteries have been designed specifically for use in applications which demand the highest levels of security and reliability. With proven compliance to the most rigorous international ???



POWERSAFE(R) SBS EON
TECHNOLOGIE-BATTERIEN: DIE IDEALE
L?SUNG F?R IHRE INFRASTRUKTUR.
PowerSafe(R) SBS EON-Technologie-Batterien sind sowohl mit 12-Volt-Frontanschluss als auch mit 2-Volt-OPzV- und OPzS-DIN-Geh?usen erh?ltlich und verf?gen ?ber eine grosse Auswahl an Amperestunden (Ah), die f?r jede Konfiguration geeignet sind.



the features inherent to the PowerSafe Visit us at
 ??? Capacity range 215 - 850Ah ??? Lead-calcium
 alloy ??? Reduced watering requirements ???
 Standard Styrene Acrylonitrile (SAN) jar with flame
 retardant UL94 V-0 PVC cover; PC flame retardant
 jar and cover are



PowerSafe(R) Vb Batteries Featuring vented, lead
 acid design, PowerSafe (R) Vb batteries are
 engineered for power supply applications with high
 safety requirements. These single 2 volt cells
 combine high energy density, long life and low
 maintenance performance for power stations and
 substations, Uninterruptible Power Supply (UPS)
 systems, industrial systems, emergency ???




PowerSafe V-FT batteries have long been
 recognised worldwide as a premium solution.
 Thanks to proprietary TPPL technology, PowerSafe
 V-FT batteries deliver superior performance while
 occupying less space than conventional standby
 power batteries. A range of compact, energy-dense
 designs are available for 19" and 23" racking.
 Request a Quote



EnerSys(R), the global leader in stored energy solutions for communications applications, has introduced the PowerSafe(R) iON 36-1800, a new Lithium-ion battery that when coupled with an Alpha(R) XM3.1-HP Broadband UPS and enclosure provides Cable Broadband operators extended run time systems to maintain network operations for up to 72 hours after an electrical grid outage.



PowerSafe(R) OPzV Batteries . Featuring an optimized plate design, PowerSafe(R) OPzV batteries have a capacity that exceeds the internationally recognized DIN standard. Long service life combined with virtually maintenance-free performance make PowerSafe OPzV one of the safest and easiest to use Valve Regulated Lead Acid (VRLA) batteries on the

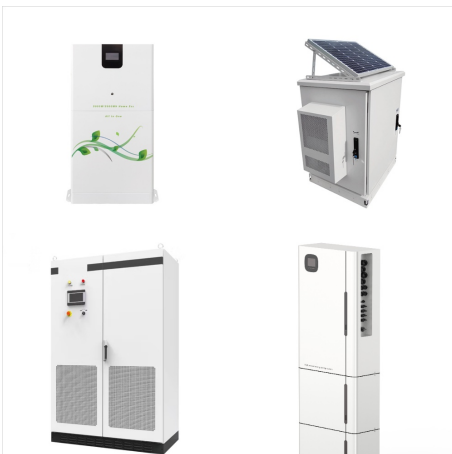

EnerSys World Headquarters 2366 Bernville Road, Reading, PA 19605, USA Tel: +1-610-208-1991 / +1-800-538-3627 EnerSys EMEA EH Europe GmbH, Baarerstrasse 18, 6300 Zug, Switzerland Tel: +41 44 215 7410 EnerSys Asia 152 Beach Road, Gateway East Building #11-03, Singapore 189721 Tel: +65 6508 1780



EnerSys World Headquarters 2366 Bernville Road
Reading, PA 19605, USA Tel: +1-610-208-1991 /
+1-800-538-3627 EnerSys EMEA EH Europe
GmbH PowerSafe CC-M Battery Performance
Specifications Subject: PowerSafe CC-M Battery
Performance Specifications Keywords: powersafe;
enersys; battery; lead-calcium alloy;



Die Enersys Batteriebaureihe Powersafe V Top
Terminal wurde speziell f?r Anwendungen
entwickelt, die h?chste Anforderungen an Sicherheit
und Zuverl?ssigkeit stellen. Fir Powersafe V-TT
erf?llt alle relevanten internationalen Standards und
ist weltweit als Premium-Energiespeicher



the manufacture of PowerSafe V Top Terminal
products is ISO 9001 certified EnerSys World
Headquarters 2366 Bernville Road, Reading PA
19605, USA Tel:+1-610-208-1991 +1-800-538-3627
EnerSys EMEA EH Europe GmbH Baarerstrasse 18
6300 Zug Switzerland EnerSys Asia 152 Beach
Road Gateway East Building #11-08 Singapore
189721 Tel: +65 6416 4800



Más potencia en menos espacio. Las baterías PowerSafe V-FT han sido reconocidas en todo el mundo como una solución premium. Gracias a la tecnología patentada TPPL, las baterías PowerSafe V-FT ofrecen un rendimiento superior y ocupan menos espacio que las baterías de reserva convencionales.



Flat plates for long duration float applications. Ideal for central office, cellular and microwave applications, PowerSafe F batteries all feature a multi-directional post design that allows cells to be configured in any orientation ??? either perpendicular to the rack support rails to optimize footprint, or parallel to enable easy maintenance while the system is online.