




Model: SP-LFP40AHA Item specification Remark
 Product Model SP-LFP40AHA Nominal Capacity
 40Ah Nominal Voltage 3.2V Weight 1.5±0.1Kg
 Internal Impedance ≤0.8mΩ(C) AC1kHz Cycle
 Life ≥2000Times 80%DOD Self-discharge rate
 ≤5% 25±2℃, 1 month Dimensions Height
 186±1mm Width 116±1mm



GBS 12V 40Ah LFP40AHA-A Lithium Battery Pack -
 Operation Voltage Range: 10V~ 14.6V - Standard
 Charging Current: 0.5C - Max Discharge Current:
 1C (continuous) / 3C (10S) - Cycle Life : >3000
 cycles (0.5C) - Operating Temperature: -20 to 65 -
 Charging Temperature Range: 0C to 65C -
 Discharge Temperature Range: -20C to 65C - Self
 Discharge Rate:<3% monthly - ???

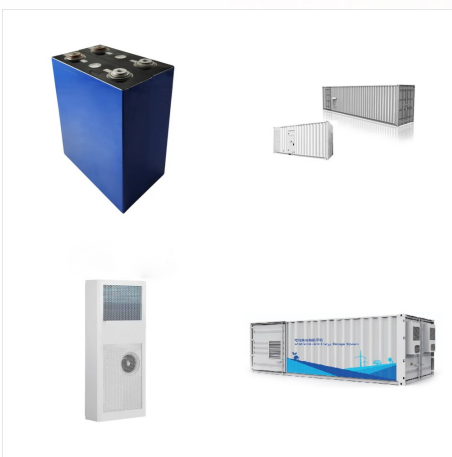

PowerTech Systems ??? Model& name&
 LFP040AHA& Older& product& marking&
 TS<LFP40AHA,& TS<LYP40AHA& Nominal&
 voltage& 3.2& V& Operating& voltage



- si le TS n'est valable le qu"? Mayotte = pas de droit ? travailler en m?tropole - si TS valable ? Mayotte et M?tropole : pas de droit ? travailler en m?tropole (s?jour autoris? sans droit au travail // principe g?n?ral des TS d?livr?s outremer selon L5523-2 et L5523-3 CT) CJ p. 29 Mais, en cas de transfert de r?sidence



TS-LFP40AHA In-System Data As part of the Cap Kart Summer 2010 upgrade, we switched from 79Ah @ 36V lead-acid batteries to 40Ah @ 39.6V lithium iron phosphate batteries (Thundersky TS-LFP40AHA). The old batteries weighed 159lbs.



Model name LFP040AHA Alternative product marking TS-LFP40AHA, WB-LYP40AHA Nominal voltage 3.3 V Operating voltage under load is 3.0 V Capacity 40 AH +/- 5% Operating voltage max 4.0V - min 2.8V At 80% DOD Deep discharge voltage 2.5 V The cells is damaged if voltage drops bellow this level



MayotteExplo vous accueille sur un catamaran tout confort de presque 17 m²tres de long et de plus de 8 m²tres de large. Ses 5 chambres spacieuses et ultra confortables vous garantiront une exp²rience inoubliable sur le lagon de Mayotte. Avec une vue panoramique exceptionnelle sur l'oc²an, son espace de vie dot² d'une cuisine toute ²quip²e et ses nombreux ²quipements ???



W S²(MODEL)² TS-LFP40AHA W S²(MODEL)²
TS-LFP40AHA 1.5kg²50g 1 8 1 m m 3000Times
5000Times 45 3CA 20CA ²Y)rLzW ² R²R u5l²``" ²
²f THUNDER SKY LiFeYPO4 POWER BATTERY
SPECIFICATIONS 85 45 85 4 6 m m 61mm. 130
120 110 100 90 ???



L"IRTS La R²union - Antenne de Mayotte propose une offre de formation riche pour le d²veloppement des comp²tences tout au long de la vie dans le champ social, m²dico-social et sanitaire. Cette offre concerne tous les publics, avec ou sans qualification de d²part : demandeurs d'emploi, salari²s, ²tudiants, stagiaires de la formation professionnelle, ²tudiants ²trangers ???



Model: SP-LFP40AHA - Free download as PDF File (.pdf), Text File (.txt) or read online for free.


Acumulator Product Model SP-LFP40AHA Nominal Capacity 40Ah Nominal Voltage 3.2V Weight 1.5 $\pm$ 0.1Kg Internal Impedance $\leq$ 0.8m Ω (C) AC1kHz Cycle Life $\geq$ 2000Times 80%DOD Self-discharge rate $\leq$ 5% 25 $^{\circ}$ C, 1 month Dimensions Height 186 $\pm$ 1mm Width 116 $\pm$ 1mm Thickness 46 $\pm$ 0.5mm $\leq$



Model name LFP040AHA Alternative product marking TS-LFP40AHA, WB-LYP40AHA Nominal voltage 3.2 V Operating voltage under load is 3.0 V Capacity 40 AH $\pm$ 5% Operating voltage max 4.0V - min 2.8V At 80% DOD Deep discharge voltage 2.5 V The cells is damaged if voltage drops below this level Maximal charge voltage 4 V The cells is damaged if



Demands d'asile. Si vous souhaitez demander l'asile en France, vous devez vous rendre ? Solidarit? Mayotte au 46AE rue Babou Salama Cavani Massimoni ? Mamoudzou afin de faire enregistrer votre demande et obtenir un rendez-vous ? la Pr?fecture.

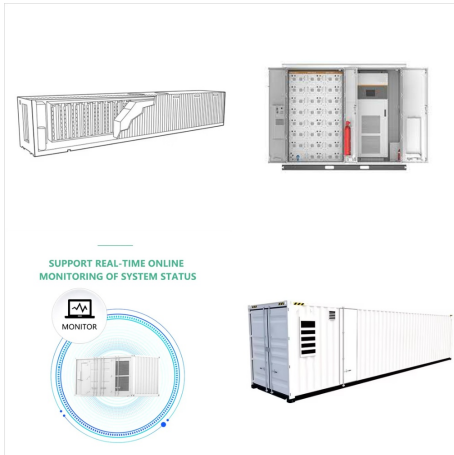

Le 25 septembre, Coallia accueille ses premiers résidents au sein d'un dispositif d'hébergement et d'insertion ambitieux dans le village relais de Toundzou ? Mayotte. ?tape Fulera (fleur en maor?) est le nom de ce village de transition qui accueillera ???



Lithium Yttrium High Power Cell
LiFePO₄/LiFeYPO₄ (3.2V/40Ah) - Original Winston Battery product WB-LYP40AHA (ThunderSky TS-LFP40AHA, Thunder-Sky TS-LYP40AHA) For all lithium batteries are basically balancer modules or a BMS (battery management system is required !



Model name LFP040AHA Older product marking TS-LFP40AHA, TS-LYP40AHA Nominal voltage 3.2 V Operating voltage under load is 3.0 V Capacity 40 AH +/- 5% Operating voltage max 4.0V - min 2.8V At 80% DOD Deep discharge voltage 2.5 V The cells is damaged if voltage drops below this level Maximal charge voltage 4.0 V The cells is damaged if voltage